

# ZONTES



**CUTTING-EDGE FOR  
TOP-TIER PERFORMANCE**

**ZONTES**



1

DIGITAL SPEEDOMETER, TACHOMETER,  
FUEL GAUGE & TRIP METRE

2


DUAL-CHANNEL  
ABS

3

FRONT &amp; REAR DUAL-CHANNEL ABS BRAKE

ABS Brake Unit

ABS Speed Sensor

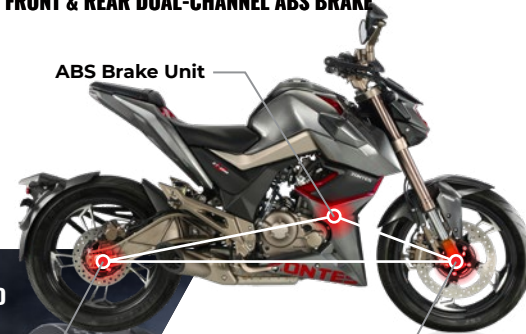

# KICKSTART ENJOYABLE JOURNEYS WITH THIS SPORTY BIKE

Ride through the streets in style with **ZT155-U**. Equipped with a host of features, it is a hi-tech naked bike that delivers impressive performance you can rely on.

**Forged Handguard:** Solid bar ends with integrated forged lever guards are fitted with brush guards as standard.

**Eco & Sport Modes:** By just pressing a button, the rider can toggle between Eco and Sport modes to suit any ride. Mode selection is clearly visible on the digital display.

**Dual-Channel ABS:** It enables calm and confident control of the motorcycle during heavy braking in any unexpected situations, especially in adverse weathers and on unstable surfaces. It is not intended to shorten the braking distance and prevent the motorcycle from dropping. When using an ABS-equipped motorcycle, speed must be reduced and sudden operations must be avoided before turning.

**Slipper Clutch:** ZONTES introduces a slipper clutch for the 155 cc models. It avoids unintentional wheel lock ups, decreases mechanical shock and enhances rider comfort and safety.

4

ECO &amp; SPORT MODES



5

SLIPPER CLUTCH



6

FORGED HANDGUARD



7

DUAL FAST CHARGING  
USB CHARGE PORT

8

LARGE DIAMETER  
BRAKE DISC

9

REAR FENDER




10

NITROGEN  
MONOSHOCKRED  
(Sport Rims)PURPLE  
(Sport Rims)

ZT155-U

AUTHORISED DEALER



\* Terms & Conditions Apply



Emission Standards

AUTHORISED DISTRIBUTOR

## ZONTES DISTRIBUTION (M) SDN. BHD. (771805-T)

Plot 4, Darulaman Industrial Estate,  
Bandar Darulaman, 06000 Jitra, Kedah.

**Tel**  
+604 917 2111

**Email**  
inquiry@zontesmalaysia.com



**Fax**  
+604 917 1726

**Website**  
zontesmalaysia.com



# ZONTES

## SPECIFICATIONS

### Chassis

Frame Type	Simple steel cradle
Length	2,005 mm
Width	865 mm
Height	1,120 mm
Wheel Base	1,370 mm
Saddle Height	830 mm
Ground Clearance	215 mm
Wheel Type	Alloy Wheels
Kerb Weight	117 kg

### Brakes

Front	Disc / 300 mm
Rear	Disc / 230 mm
ABS	Dual-channel ABS

### Suspension

Front	USD Forks
Rear	Monoshock

### Lamp & Battery

Head Lamp Type	LED
Head Lamp	LED 12V
Tail Lights	LED
Battery	12V 8AH
Turn Signal Lamp	Yes
Position Lamp	Yes
Pilot Lamp	No
Battery Type	Full DC MF
Pass Light	Yes
Indicators	Yes
ABS Light	Yes
Auxiliary Light	Yes
Brake / Tail Light	Yes

### Tyres

Tyre Type	Radial Tubeless
Tyre Size (Front)	110/70-17
Tyre Size (Rear)	130/70-17
Wheel Size (Front)	17-inch
Wheel Size (Rear)	17-inch

### Engine

Displacement	155 cc
Emission Type	Euro5
Engine Type	Single-cylinder, 4 stroke, SOHC
Valve	4 valves
Cooling System	Water-cooled
Starter System	Self starter
Max Power	18.8 hp @ 9,250 rpm
Max Torque	16 Nm @ 7,500 rpm
Compression Ratio	12.5:1
Bore	58 mm
Stroke	58.7 mm
Fuel Delivery System	Bosch EFI
Gearbox	6 speed
Fuel Capacity (Litres)	12.5 litres
Mileage	40 – 45+ kmpl
Air Filter Type	Paper filter element
Lubrication	Wet sump
Ignition System	CDI
Clutch Type	Multi-disc in oil bath
Lubrication System	Positive
Drive Type	Chain Drive